



ELECTRICAL LEGEND	
E1	DOOR ENTRY (CORRIDOR) A. MODULE SET BOX @1150mm HT 1. MMR/ DND/ BELL 2. LAUNDRY INDICATOR
E2	DOOR ENTRY (FOYER) A. MODULE SET BOX @1150mm HT 1. KEY CARD CONNECTED TO MCB B. MODULE BOX SET @1150mm HT 1. DND PANEL CONNECTED TO MCB C. MODULE BOX SET @1150mm HT 1. SWITCH 1: BATHROOM CEILING LIGHT CONNECTED TO KEY CARD 2. SWITCH 2: TWO WAY LIGHT CONNECTED TO KEY CARD
E3	BEDSIDE 1 A. MODULE SET BOX @700mm HT 1. BEDSIDE TABLE LAMP SWITCH CONNECT TO MASTER SWITCH & KEY TAG 2. DUMMY PLATE 3. 2A USB SOCKET CONNECT TO MCB 4. 2 NOS. 13A INTERNAL SOCKET CONNECT TO MCB B. MODULE BOX SET @150MM HT 1. NIGHT LAMP CONNECTED TO KEY TAG 2. POWERPOINT FOR BEDSIDE TABLE LAMP CONNECTED TO KEY TAG
E4	BEDSIDE 2 A. TOUCH AC THERMOSTAT 1. 2 MODULE SET @700MM HT CONNECTED TO KEY TAG B. MODULE SET BOX @700mm HT 1. MASTER SWITCH WITH INDICATOR CONNECT TO KEY TAG 1. 2 WAY SWITCH CONNECTED TO KEY TAG 2. BEDSIDE TABLE LAMP SWITCH CONNECT TO MASTER SWITCH & KEY TAG 3. ALL CEILING LIGHT POINT TO CONNECT TO MASTER SWITCH 4. 2A USB SOCKET CONNECT TO MCB 5. 13A INTERNAL SOCKET CONNECT TO MCB C. MODULE BOX SET @150MM HT 1. TELEPHONE POINT D. MODULE BOX SET @150MM HT 1. NIGHT LAMP 2. POWERPOINT FOR BEDSIDE TABLE LAMP CONNECTED TO KEY TAG
E5	MINIBAR UNIT A. MODULE SET BOX @600mm HT 1. 6A ½ UNIVERSAL SOCKET CONNECT TO KEY TAG (FOR COFFEE MACHINE) 2. 6A ½ UNIVERSAL SOCKET CONNECT TO KEY TAG (FOR KETTLE) 3. 6A ½ UNIVERSAL SOCKET CONNECT TO MCB (FOR MINIBAR UNIT)
E6	WARDROBE LIGHT 1. POWERPOINT FOR WARDROBE LIGHT @600MM HT
E7	TV WALL POINTS A. MODULE SET BOX @1400mm HT 1. 2NOS. DUMMY PLATE SWITCH 2. 6A ½ UNIVERSAL SOCKET CONNECT TO KEY TAG (FOR TV POWERPOINT) 3. 6A ½ UNIVERSAL SOCKET CONNECT TO KEY TAG (FOR SETUP BOX) B. MODULE SET BOX @1400mm HT 1. COAX CABLE 2. INTERNET POINT (CAT 6 CABLE)
E8	WORKTABLE CEILING LAMP A. MODULE SET BOX @150mm HT 1. WORKTABLE CEILING LAMP SWITCH CONNECTED TO MASTERSWITCH
E8a	BALCONY LIGHTING SWITCH 1. BALCONY LIGHTING SWITCH CONNECTED TO MASTERSWITCH @1150MM HT
E9	WORKTABLE / DAY BED A. MODULE SET BOX @150mm HT 1. 2 NOS. 13A INTERNATIONAL SOCKET CONNECTED TO MCB 2. 1 NOS. USB PORT B. MODULE SET BOX @150mm HT 1. INTERNET LAN
E10	WC AREA 1. TELEPHONE POINT @1075MM HT
E11	VANITY COUNTER TOP A. MODULE SET BOX @1150mm HT 1. SHAVER/ HAIR DRYER POINTCONNECTED TO KEY TAG
E12	VANITY MIRROR & NIGHT LAMP @1500MM HT A. POWERPOINT FOR LED MIRROR @ 1500MM HT B. MODULE SET @ 200MM HT 1. NIGHT LAMP CONNECTED TO KEY CARD
E13	MOTORIZED BLACKOUT BLINDS A. POWERPOINT FOR BLINDS @ 2300MM HT CONNECTED TO KEY TAG B. MODULE BOX SET @1150MM HT 1. MOTORIZED BLINDS SWITCH
NOTE: ALL LIGHTING AND SWITCHING INFORMATION IS SUBJECT TO CLIENT'S LIGHTING CONSULTANTS FINAL DESIGN.	

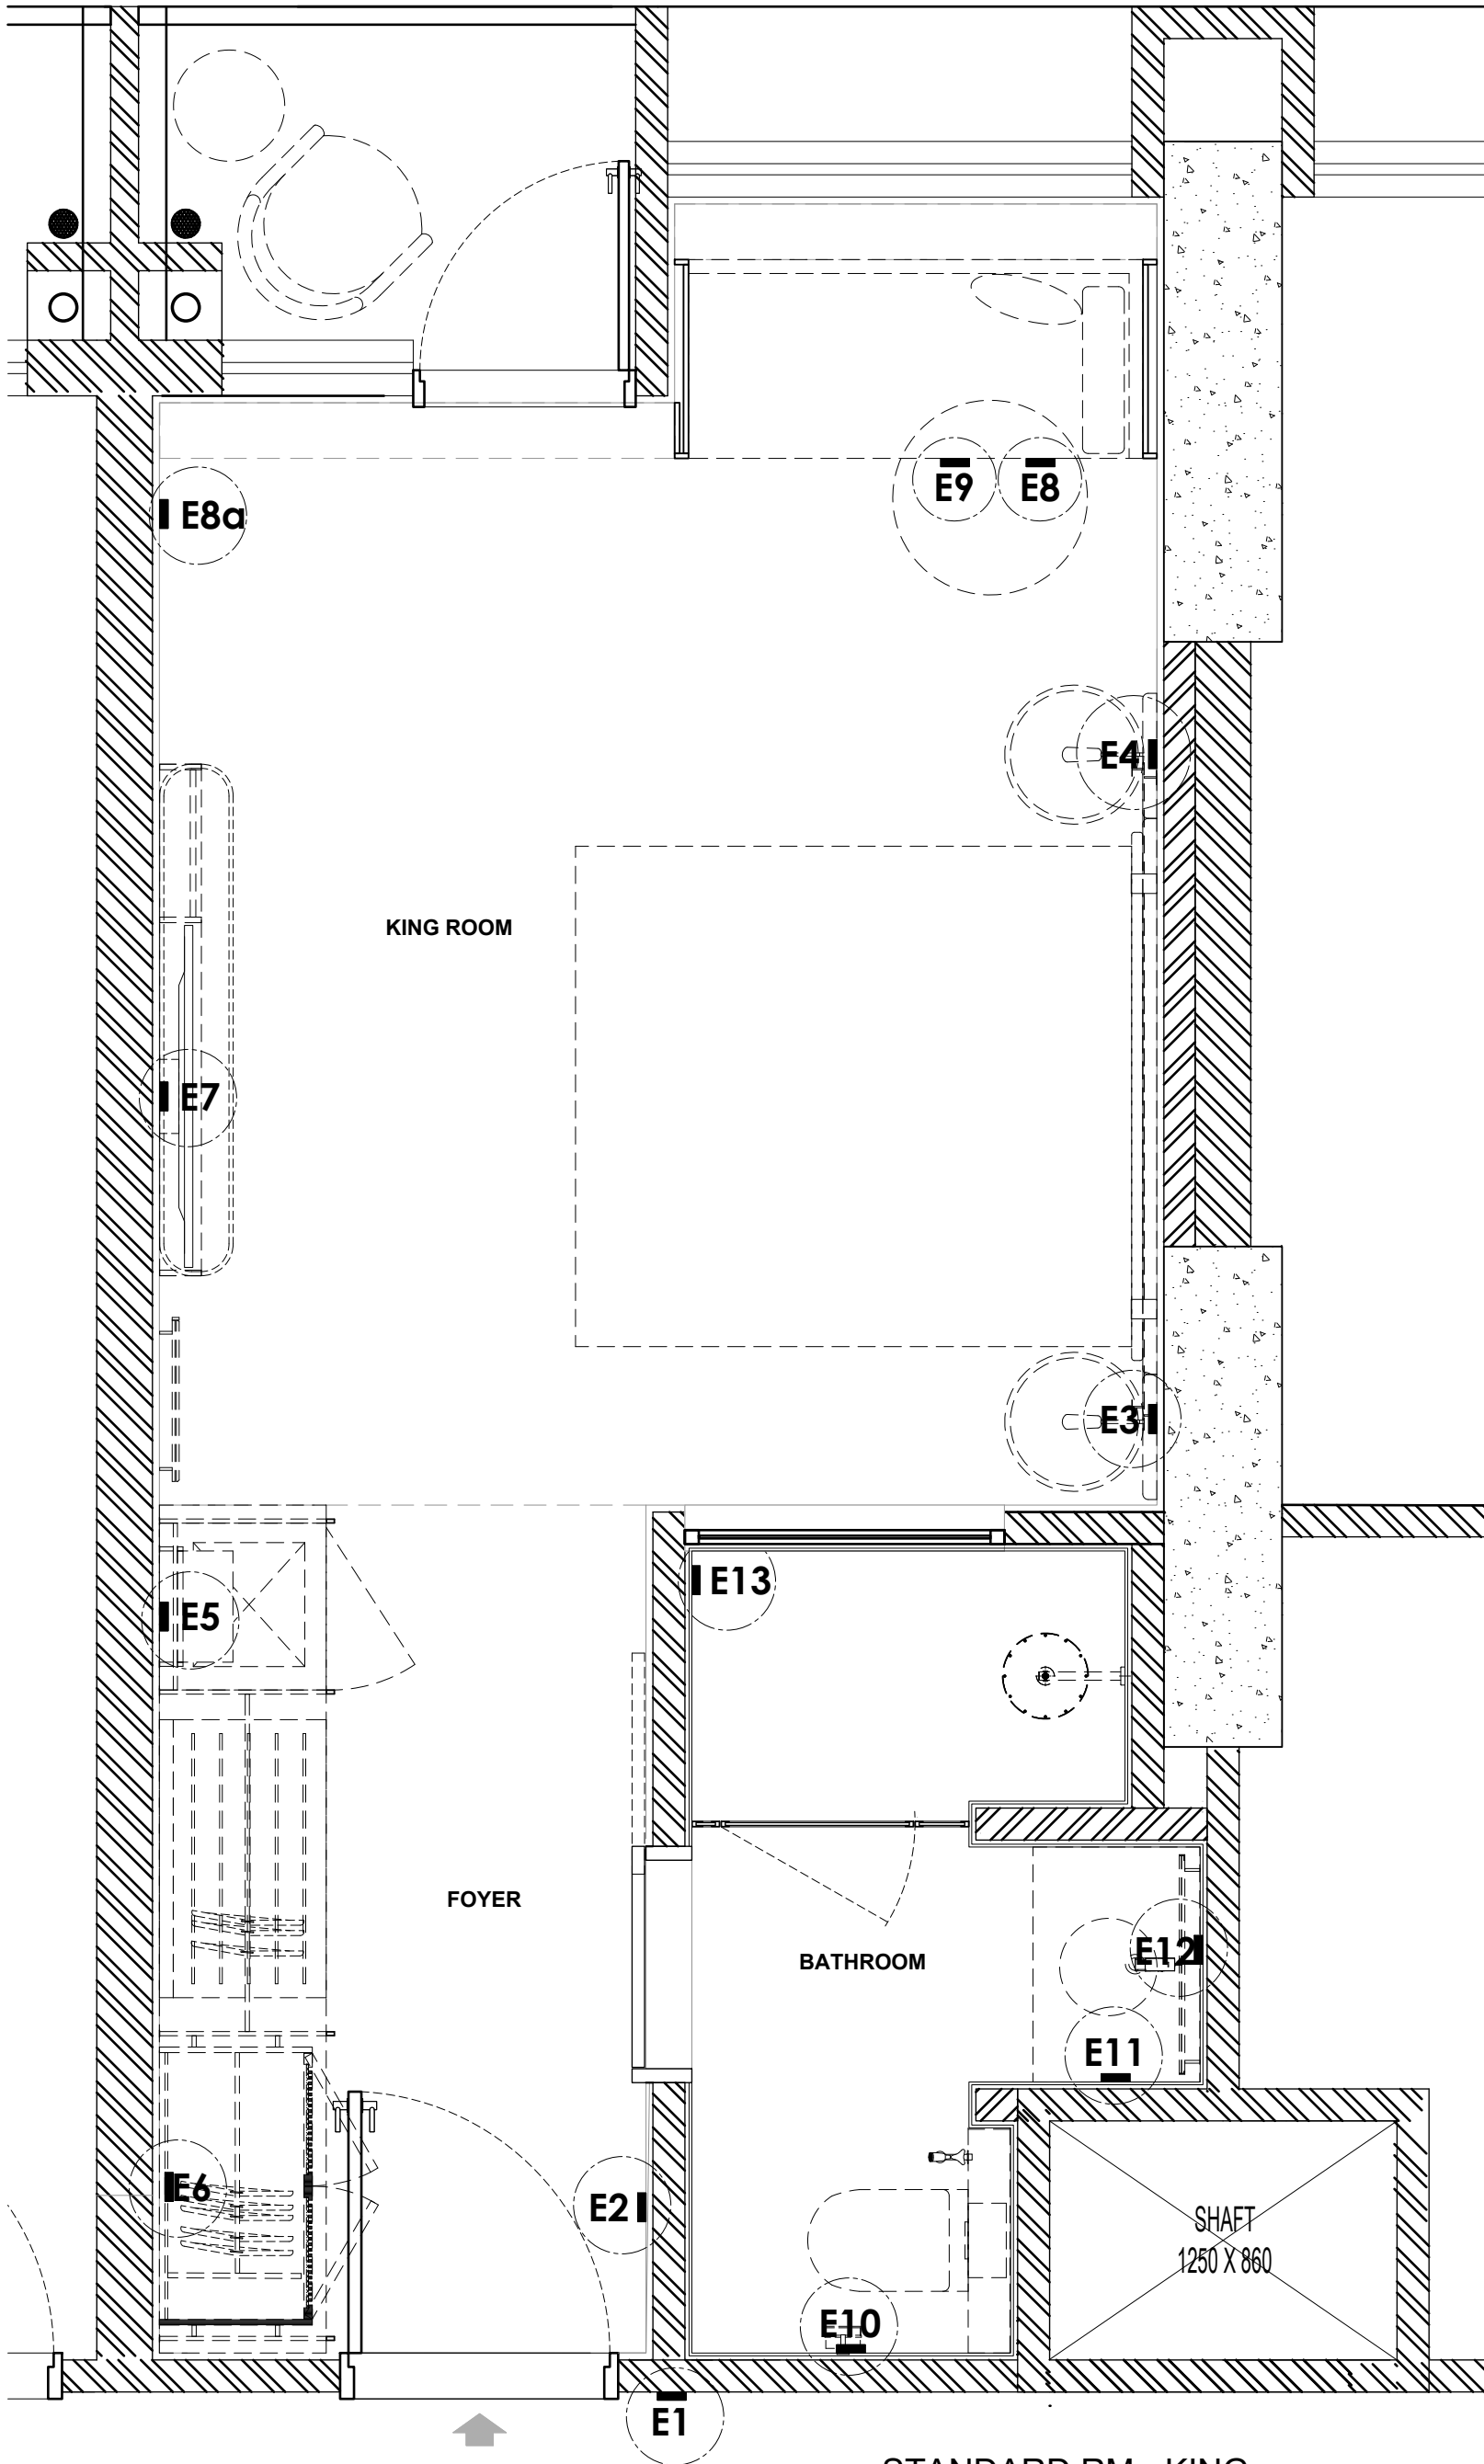

D STANDARD RM - KING
POWER PLAN
SCALE: 1:25 (A2)

PARTICULAR NOTE:

- THIS LAYOUT IS ONLY INDICATIVE OF PARTICULARFUNCTIONAL / USAGE SOCKETS & SWITCHES. IT IS ONLY FOR REFERENCE/ COORDINATION WITH MEP AND SHALL NOT BE USED FOR QUANTIFICATION, PRICING OR CONSTRUCTION.
- SOCKET DIMENSION FROM FFL TO CENTER OF SOCKET.
- EXACT LOCATIONS OF ALL SOCKETS SHALL BE COORDINATED WITH LIGHTING SWITCHES AND FINISHED IN SHOP DRAWINGS

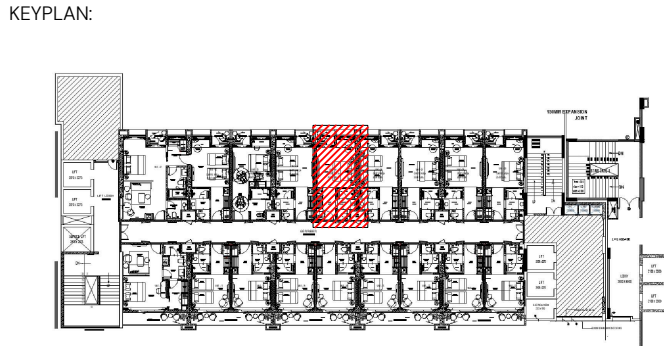

General Notes:-

- This drawing is property of THE BNK GROUP and is not to be reproduced or copied or used for any other purpose than for which it has been issued.
- Dimensions are not to be scaled.
- All dimensions are in millimeters, unless specified otherwise:
- The Contractor's need to verify all dimensions on site before making any shop drawings and executions.
- Any differences between written dimensions on this drawing and actual site measurements should be brought to the immediate attention of Person In-charge before execution.
- Drawings Related with another consultants to be read in Conjunction & Crossed Checked.

DWG. NO:- HRL-ID-GR-KRA-103

REV.	DATE	REV.	DATE	AREA
01	01 AUGUST 2025			N/A
02	13 AUGUST 2025			JOB NO.
				AO011

STAMP & SIGN OF ARCHITECT

DATE OF ISSUE	DRAWN BY	CHECKED BY	REV.	02
19 DECEMBER 2025	CP	SP		

DRAWING TITLE

STANDARD RM - KING

POWER PLAN

SCALE	1:25 (A2)	NORTH	
CLIENT	NEW MODERN BUILDWELL PVT LTD		

GUESTROOM
REGENTA HOTEL

LOCATION	GOMTINAGAR EXTENSION, LUCKNOW
STAGE	SCHEMATIC DESIGN



THE BNK GROUP
API Business Suites - 603
Sheikh Zayed Rd - Al Barsha Al Barsha 1 -
Dubai, United Arab Emirates
Tel: +971 4 320 0359

Marathon Futurex, A3010/3011,
Mafatal Mill Compound, Lower Parel (E),
Mumbai-400013
Tel: +91 22 6610 0313

email: info@thebnkgroup.com
website: www.thebnkgroup.com